






VACUUM

LARGE


GRIPPER

VLG



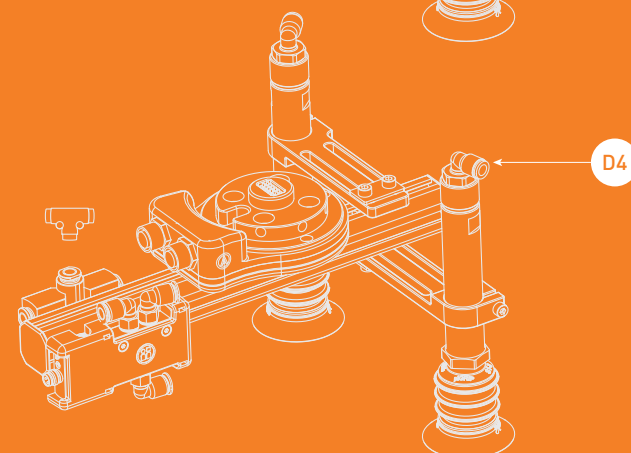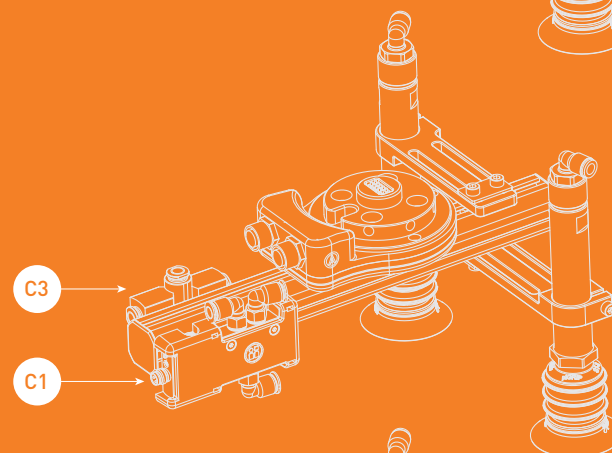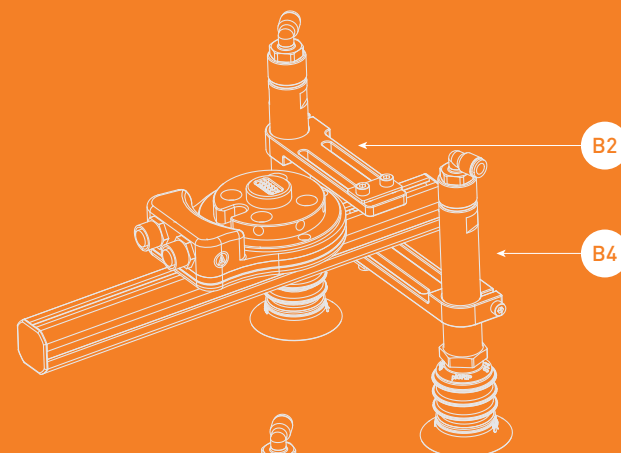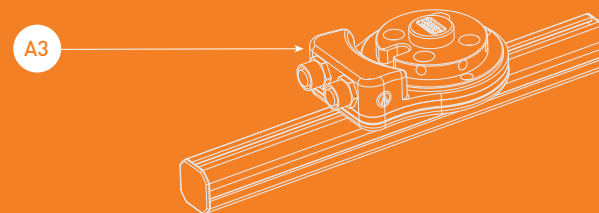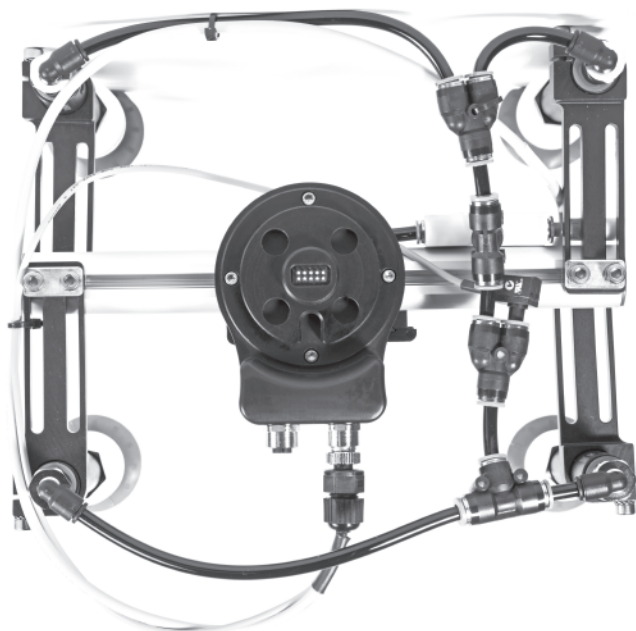

99-00000602-00

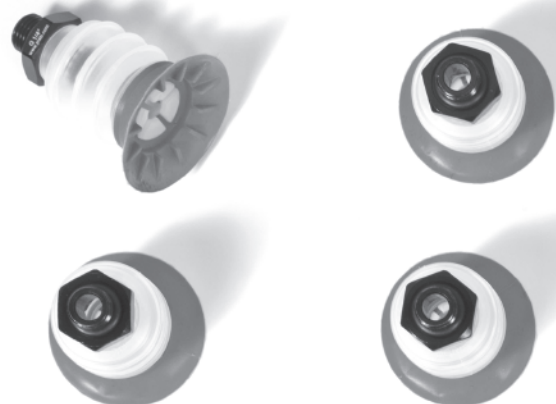

99-00000601-00



99-00000600-00




99-00000596-00



99-00000565-00



99-00000599-00

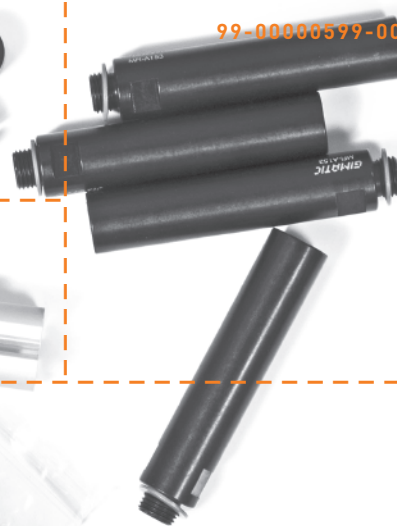

94-00000101-00



99-00000597-00



98-00070273-00



99-00000598-00



99-00000641-00



99-00000578-00




99-00000579-00



99-00000582-00




14-00000039-00




99-00000581-00




70053

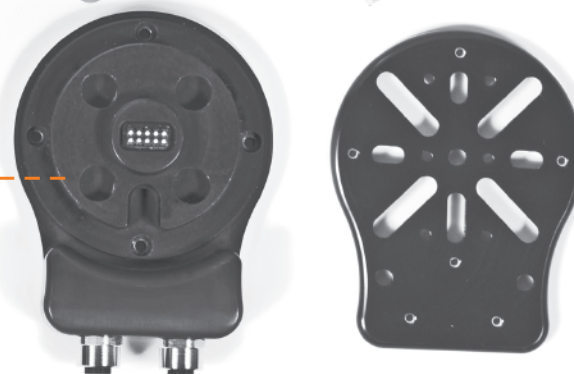

A

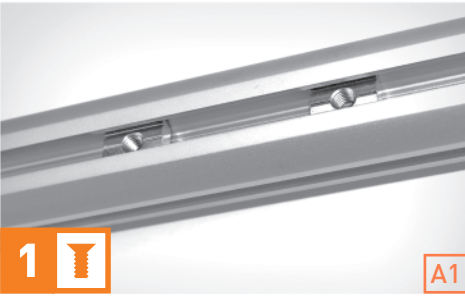

A1





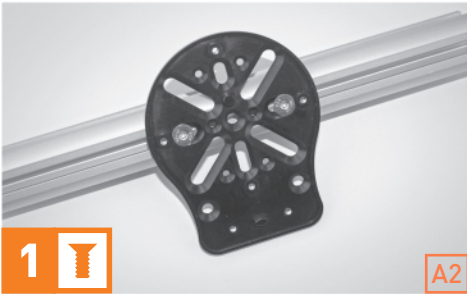


A2




A3




B

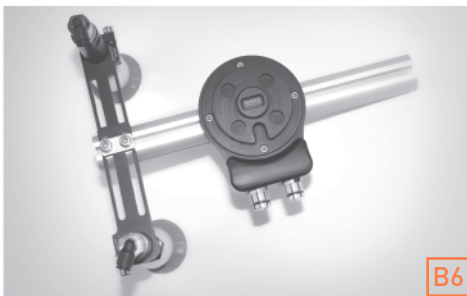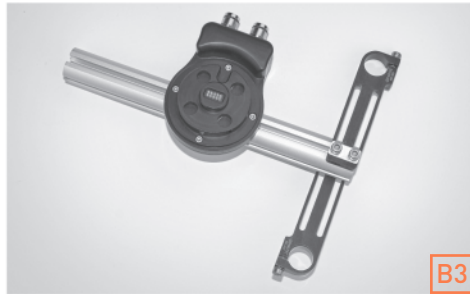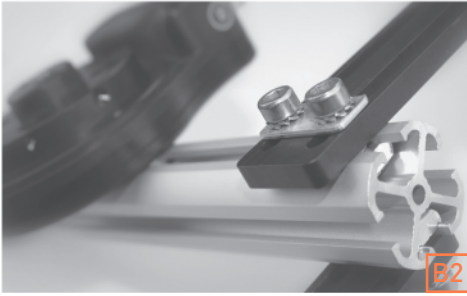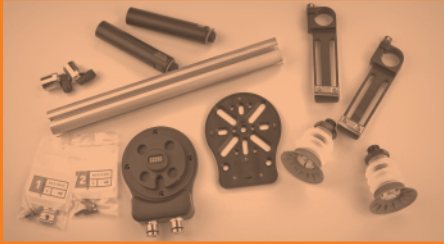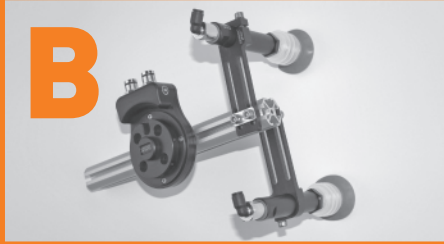

C




D

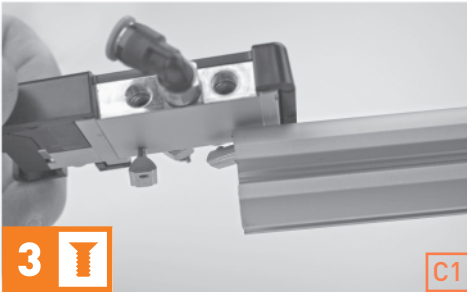

3

C1

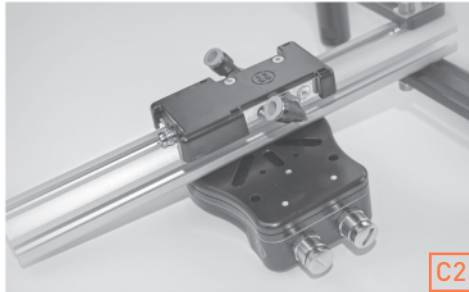


C2



D1



D2

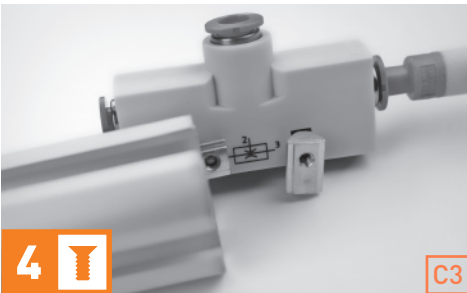

4


C3




C4



D3

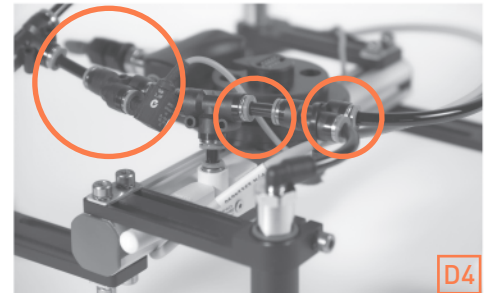

D4

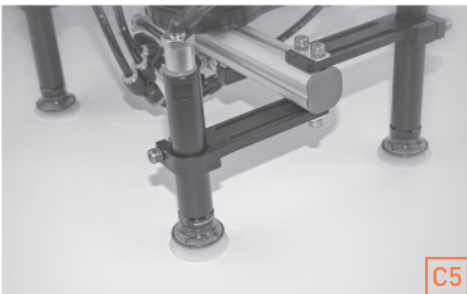

C5




C6




D5


E

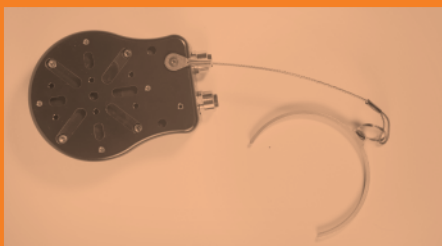

E1

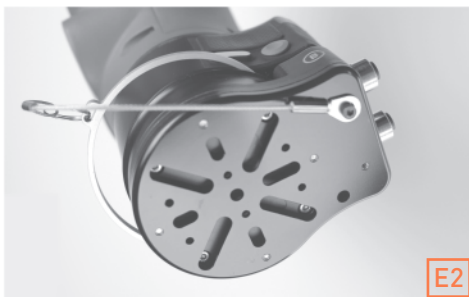

E2

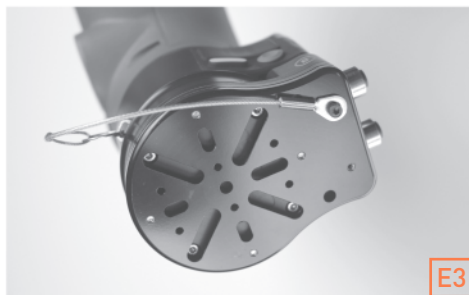

E3

Software Configuration
 Configuración del software
 Configuration logicielle
 Software-Konfiguration
 软件设置
 ソフトウェア設定
 소프트웨어 구성

<http://mfg.rethinkrobotics.com/intera>

MAINTENANCE, MANTENIMIENTO, WARTUNG, 维护, ENTRETIEN,
 メンテナンス, 유지 보수

SOLENOID VALVE

14-00000039-00

Standard nominal flow rate	340—380 l/min
Working pressure	2.5—8 bar
Operating medium	Compressed air in accordance with ISO 8573-2010 [7:4:4]
Medium temperature	-5—60 °C
Ambient temperature	-5—60 °C

VACUUM GENERATOR

99-00000578-00

Working pressure	1—8 bar
Working pressure for max vacuum	4.5 bar
Max vacuum	89%
Operating medium	Compressed air in accordance with ISO 8573-2010 [7:4:4]
Medium temperature	0—60 °C
Ambient temperature	0—60 °C

SUCTION CUPS

When the pressure under the suction cups is 0.6 bar below the atmospheric pressure:

Type	Vertical lifting force of 4 suction cups
99-00000601-00	156 N
99-00000602-00	129.6 N

	SHCS		FHCS		BHCS		SHSS	
FASTENER SIZE	(N-m)	(in-lb)	(N-m)	(in-lb)	(N-m)	(in-lb)	(N-m)	(in-lb)
M2.5	1.3	11.5	—	—	—	—	—	—
M3	2.2	19.5	1.4	12.4	1.4	12.4	—	—
M4	4.8	42.5	3.1	27.4	3.1	27.4	1.3	11.5
M5	10	88.5	6.1	54.0	6.1	54.0	—	—
								

System Ingress Protection (IP) Rating: IP54